ProCONNECT
Professional Connecting Panels

PROCONNECT GAS SHOCK MODULAR SERIES USER MANUAL
PC700 Series

Thank you for purchasing our professional table top connecting panel

CAUTION

• Only connect the power connection to a voltage feed of 240 Volt, 50Hz, single-phase with protective earth.
• There is a 10A fuse built-in to the IEC-60320 rubber connector, which may not be replaced by a fuse with a higher ampere value. A spare fuse can be found in the fuse drawer of the IEC-Plug.
• Do not wet the unit, and keep in a dry, well-ventilated area.

INSTALLATION

• The ProCONNECT should be installed by a professional technician.
• Feed the selected plates, with their respective cables, through the unit from the underside. Take care not to damage the cable or plate. Use the screws to tighten the plate in position.
• Please check and confirm the supplied template with the size of the unit. avEFEKTs or its registered dealer cannot be held responsible for damages due to incorrect cut-outs.
• Define the point of installation accurately and mark out the area to be cut with the template, or attach the template directly onto the table/surface.
• The area to be cut should be made with the appropriate tools, depending on the material of the plate. Make the cut-out.
• Insert the ProCONNECT through the opening and position correctly.
• Attach the fasteners to the appropriate notches underneath the unit. The area with the insert nut must be parallel to the plate, and the screw-head must point away from the plate. Adjust the unit to the desired position, and tighten with screws.
• Mount the cables using appropriate mounting material. Make sure that the cables will not get broken, jammed or distended when the unit is opened or closed. The centerpiece must be able to move freely, and the cables must have sufficient slack for when the unit is opened.
•Connect the Audio Visual cable-ends to the respective cables / sockets. Please also connect the 240V Power to a Wall Plug.
• Ensure that the power outlet and the signal connectors are only being used with the maximum allowable voltage and current. NOTE: Maximum total load is 10A (2400W) across the entire unit.

INSTRUCTIONS FOR USE

• Open: Press on the centerpiece of the lid until the latch audibly disengages. Release, and the lid will pop open, showing the available connections.
• Close: Press down on the centre of the lid until the latch audibly engages. Release, and the lid will be closed.
• Cleaning: Switch off the system or pull the plug before cleaning. Do NOT use any cleaning agents or water on the unit. Only use a soft and lightly moisturized cloth.

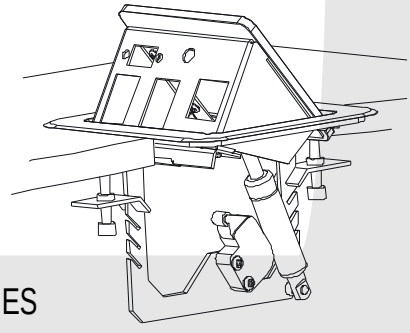

1 YEAR WARRANTY ON ALL PROCONNECT SERIES